


# WARWICK INDUSTRIES INC.

## HOW TO USE CUP-2QB SET UP

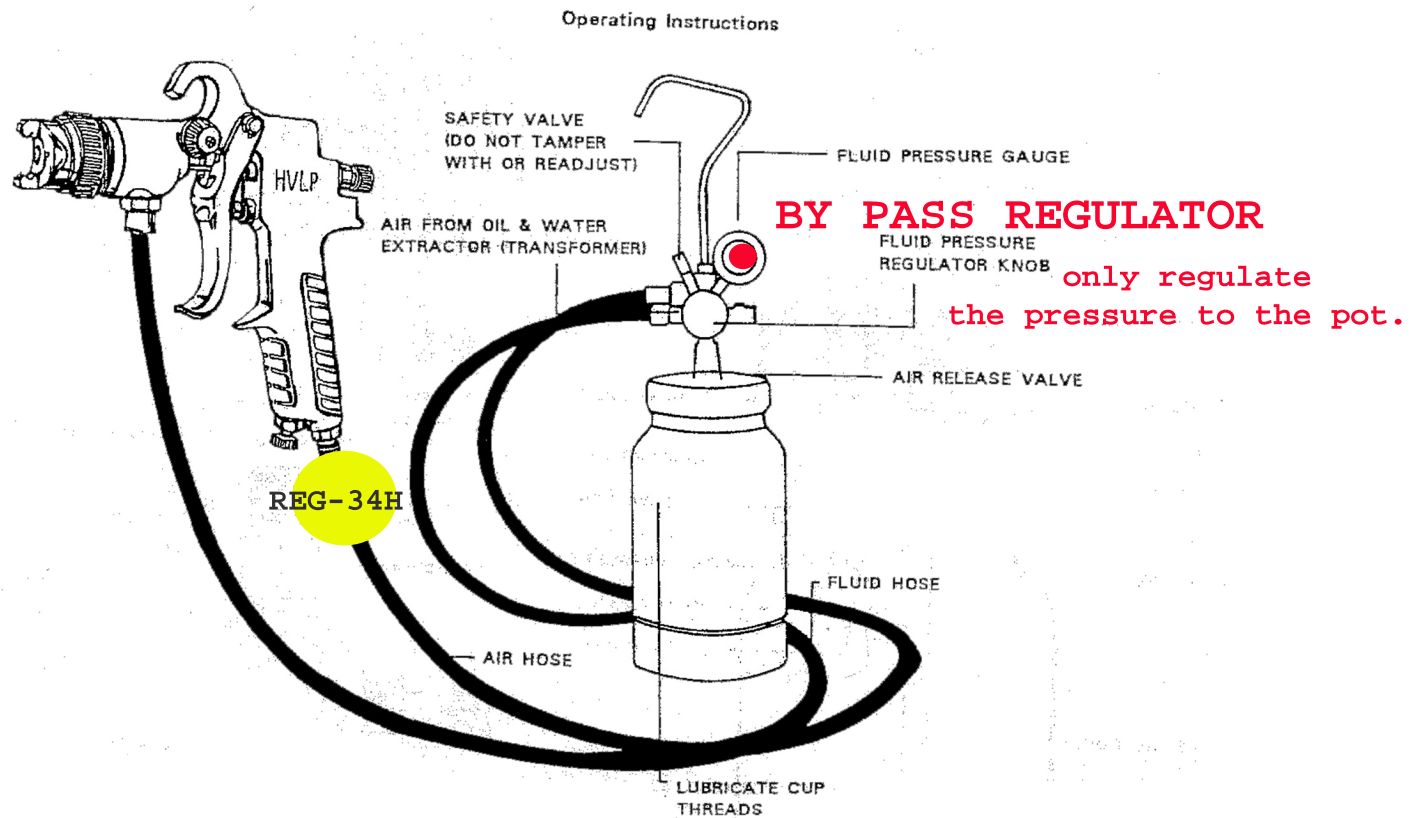

1. Choose the right size for your material
2. Make sure minimum inlet pressure. (REG34H)
3. Suggest to use 5HP+ air compressor w/20+ gallon air tank to provide sufficient air supply.
4. To spray paint having viscosity similar to most **lacquers**, maintain the air pressure inside the pot at **2 PSI** according to the gauge reading. To spray other types of paints having **thicker** viscosity, increase the pressure inside the pot by small increments, until a perfect atomization is present.